

Angry Birds touch sensor installation instructions

- 1) assemble Banto sensor
- 2) disconnect the monitor power cable, DVI cable, USB cable, and barrel connector
- 3) remove two lower mounting bolts for monitor, hold monitor frame so it does not fall and then remove the two upper mounting bolts



4) slide the monitor assembly to the left to allow the right edge to clear the rear door cleat, slide the right edge of the monitor assembly towards you and remove from the cabinet.

**the monitor assembly is heavy have a second person there to assist with removal




5) place the monitor assembly on a soft flat surface screen down

6) remove the 8 screws holding the blue bezel to the wood mounting frame



7) remove the 4 allen bolts on the wood mounting frame

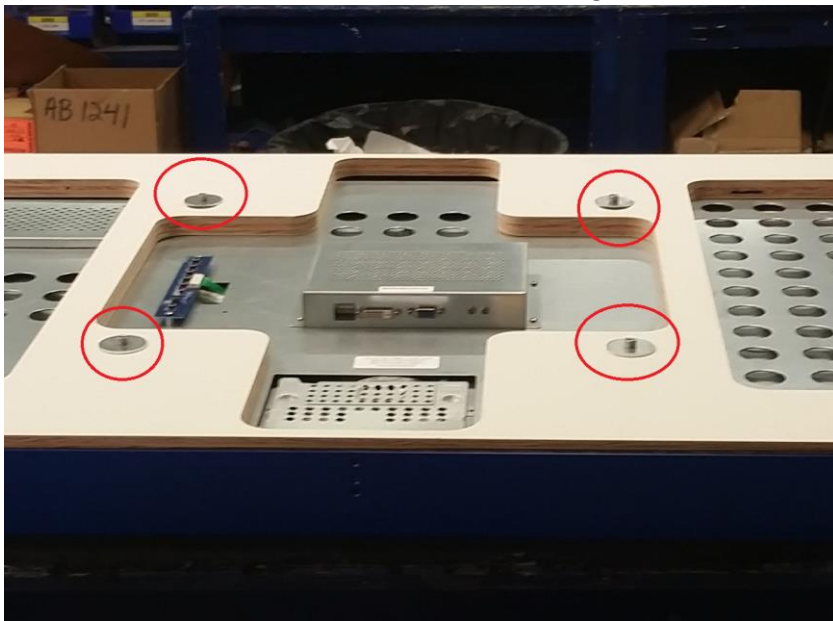

8) remove the two ABS spacers on the long sides of the monitor assembly




9) lift off the wood mounting frame

10) remove one ABS spacer on the long side of the monitor and one ABS spacer on the short side of the monitor.



11) lift the monitor out of the assembly, and remove the remaining two spacers

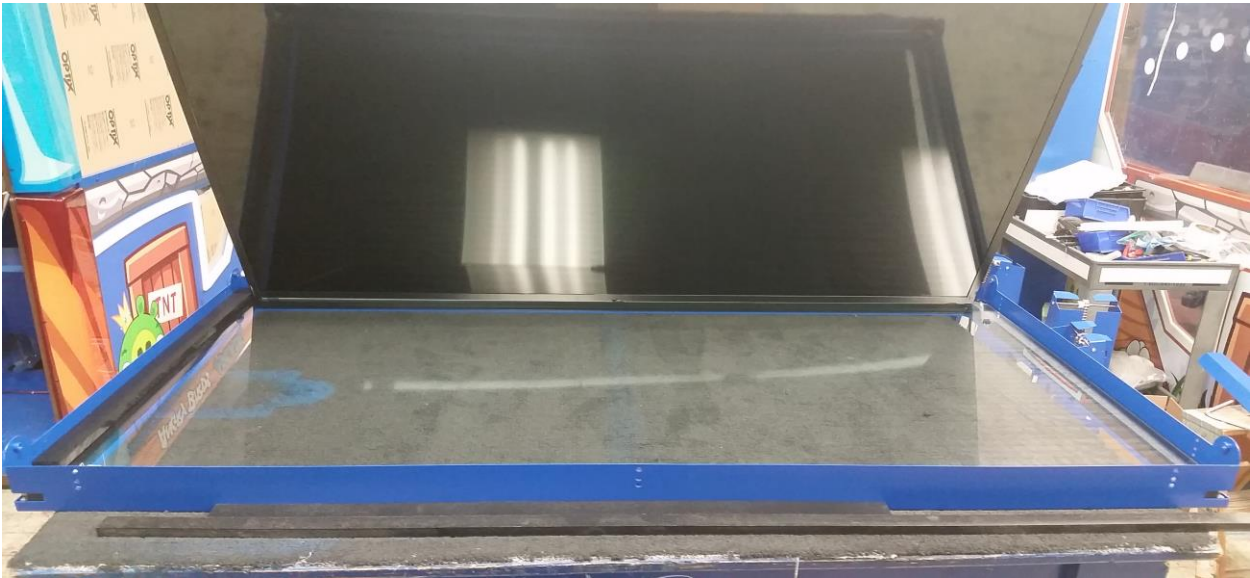

12) lift the cover glass from the assembly



13) remove the four interlocking spacers




14) remove the Banto touch frame



16) reassemble in reverse order.

NOTES:

When installing Banto make sure that you do not pinch the wiring for the touch screen in the metal bezel

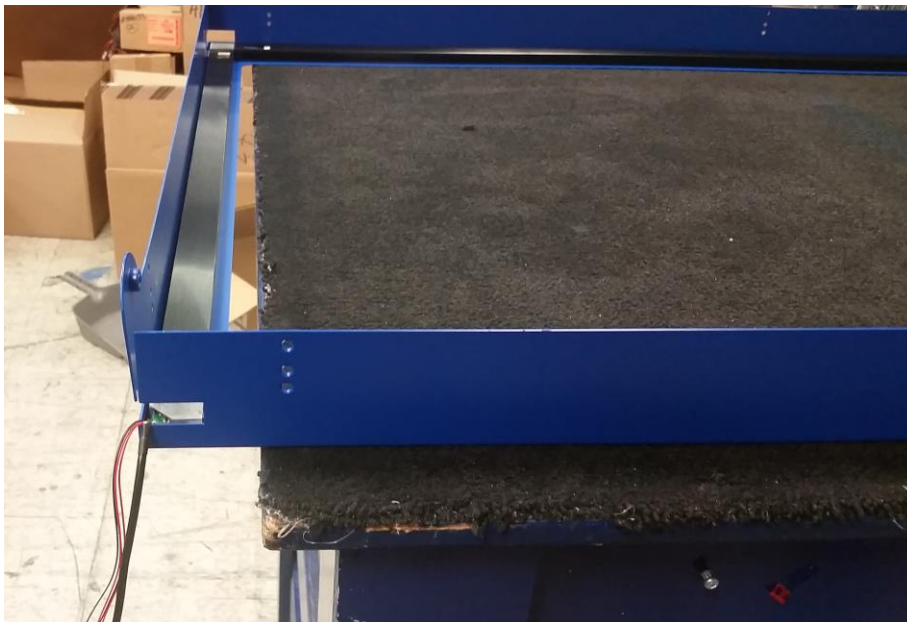

When installing monitor the DVI connector must face the same direction where the wiring is coming out of the bezel allow the harnessing to reach when installed in the game.

